


Question no.1 is compulsory.

Attempt Any Three from question no. 2 to 6.

Use illustrative diagrams where ever required.

- Q1 Solve any **FOUR**
- | | | |
|---|---|----|
| a | Define a fluid and explain Newton's law of viscosity | 05 |
| b | Explain boundary layer separation and methods to control it | 05 |
| c | A two dimensional flow is described in the Lagrangian system as $x = x_0 e^{-kt} + y_0(1 - e^{-2kt})$ and $y = y_0 e^{-kt}$. Find the equation of a fluid particle in the flow field | 05 |
| d | Explain Induced drag | 05 |
| e | Draw a sketch of an Orifice meter | 05 |
- Q2 a Find the magnitude and direction of resultant pressure acting on a curved face of a dam which is shaped according to the relation $y = x^2/9$ as shown in the figure. The height of the water retain by the dam is 10m. Consider the width of the dam as unity.

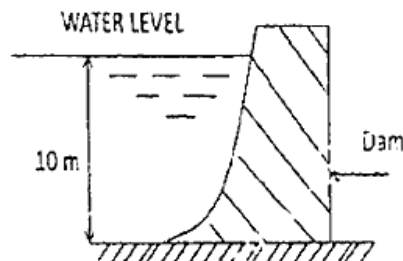

- b The stream lines is represented by $\psi = x^2 + y^2$
- | | | |
|-------|---|----|
| (i) | Find its corresponding velocity potential | 10 |
| (ii) | Determine the velocity and its direction at (2,2) | |
| (iii) | Sketch the streamlines and also show the direction of flow. | |
- Q3 a Starting from Navier stoke equation for incompressible laminar flow; derive an equation for velocity profile for Couette flow. State the assumptions made. 10
- b 360 lit/sec of water is flowing in a pipe. The pipe is bent by 120° . The pipe bend measures 360 mm x 240 mm and volume at the bend is 0.14m^3 . The pressure at the entrance is 73KN/m^2 and exit is 2.4m above the entrance section. Find the resultant force and the direction on the bend. 10
- Q4 a If velocity distribution, u in laminar boundary layer over a flat plate is assumed to be given by second order polynomial
- $$u = a + by + cy^2$$
- where y is the perpendicular distance measured from the surface of the flat plate, and a , b and c are constants. Determine the expression of velocity distribution in dimensionless form as, U is main stream velocity at boundary layer thickness δ . Further also find boundary layer thickness in terms of Reynolds number. 10

[TURN OVER

2

QP Code : 30793

- b A pipe 60 mm diameter and 450 m long slopes upwards at 1 in 50 . an oil of viscosity 0.9 Ns / m^2 and sp. gr. 0.9 is required to be pumped at the rate of 5 liters/s. 10
- (1) Is the flow laminar?
- (2) What pressure difference is required to attain this condition?
- (3) What is the power of the pump required assuming overall efficiency 65%?
- (4) What is the centre line velocity and the velocity gradient at pipe wall?
- Q5 a For a normal shock wave in air Mach number is 3. If the atmospheric pressure and air density are 26.5 KN/m^2 and 0.413 kg/m^3 respectively, determine the flow conditions before and after the shock wave. Take $\gamma = 1.4$ 10
- b Derive an expression of "critical pressure ratio" for compressible fluid flow 10
- Q6 a A pipe of diameter 0.4 m and of length 2000 m is connected to a reservoir at one end. The other end of the pipe is connected to a junction from which two pipes of length 1000m and diameter 30 cm runs parallel. These parallel pipes are connected to another reservoir which is having a level of water 10m below the water level of the above reservoir .Determine the total discharge, if coefficient of friction $f = 0.015$.neglect the minor losses. 10
- b Explain
- i) Moodys Diagram
- ii) Major and Minor losses in pipes